

Beyond Biometrics

Access Control, Time Attendance & IoT



*Selected models



- FingerTec Worldwide
- Fingertec
- info@fingertec.com


Read More

SOFTWARE & APPLICATIONS FOR BIOMETRIC DEVICES

ingress

Time Attendance & Access Control

- 33 Reports For Data Analysis
- Supports Surveillance From Multiple PCs Concurrently
- Push Notifications When Door Events Are Triggered



TCMSV3

Time Attendance

- Support Normal, Overnight and Multiple Shift Configurations
- Group, Personal Duty Rosters & Holiday Settings
- Simplify Payroll Integration by Exporting Attendance Data




Full Hardware
Specification



Full Software
Specification



APPLICATION

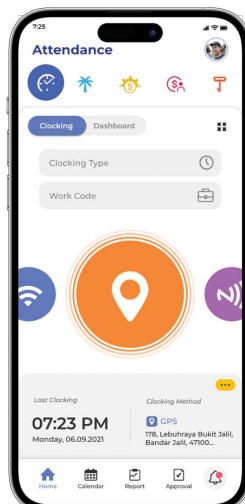

TimeTec Attendance
Cloud Time Attendance



TimeTec Access
Cloud Access Control



TimeTec Visitor
Cloud Visitor Management

**Actual UI from TimeTec HR app*




Face Recognition

Access Control & Time Attendance

Access Control & Time Attendance

Time Attendance

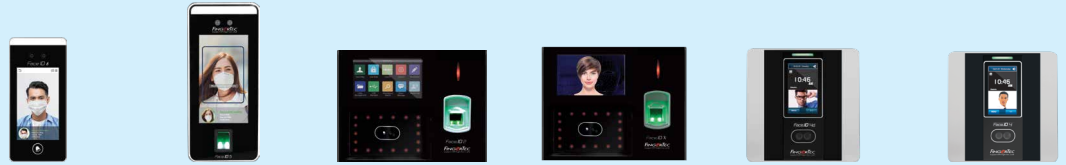

| Model | Face ID 6 | Face ID 5 | Face ID 2 | Face ID X | Face ID 4D | Face ID 4 |
|----------------------------------|-------------------------------|---|--------------------------------------|--|------------------------|-----------------------|
| Dimension (L X W X H), mm | 73 x 23 x 158 | 92 x 23 x 203 | 194 x 110 x 145 | 194 x 110 x 145 | 151 x 26 x 150 | 151 x 26 x 150 |
| Templates | Face: 1k Palm: 800 | Face: 6k Fingerprint: 6k Palm: 3K | Face: 1,200 Fingerprint: 10k | Face: 3k (1:N), 30k (1:1) Fingerprint: 10k | Face: 3k | Face: 3k |
| Transactions | 150,000 | 200,000 | 200,000 | 1,000,000 | 200,000 | 200,000 |
| Verification Method | Face, Palm, Password | Face, Fingerprint, Palm & Password | Face, Fingerprint & Password | Face, Fingerprint, & Password | Face, & Password | Face & Password |
| Communication Method | TCP/IP, USB Host, RS485 | TCP/IP, RS485 | TCP/IP, RS232, RS485, USB disk | TCP/IP, RS232, RS485, USB disk | TCP/IP, USB Host | TCP/IP, USB Host |
| Verification Time | Face: <1s | Fingerprint: <1s, Face: <2s, Palm: <0.35s | Fingerprint: <1s, Face: <2s | Fingerprint: <1s, Face: <2s | Face: <2s | Face: <2s |



Controller

Security Hub for Smart Control



| Model | INGRESSUS I | INGRESSUS II | INGRESSUS IV |
|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Dimension (L X W X H), mm | 186 x 106 x 36 | 186 x 106 x 36 | 226 x 106 x 36 |
| Templates | Fingerprint: 3k Password: 30k | Fingerprint: 3k Password: 30k | Fingerprint: 3k Password: 30k |
| Transactions | 100,000 | 100,000 | 100,000 |
| Verification Method | Wiegand | Wiegand | Wiegand |
| Communication Method | TCP/IP | TCP/IP | TCP/IP |

Add On Enrolment



| Model | Ofis-Z |
|----------------------------------|---|
| Dimension (L X W X H), mm | 45 x 78 x 40 |
| Supporting OS | MS Windows/ MS Internet Explorer (IE 9) |
| Pixel Resolution | 512 dpi (average x, y over the scanning area) |
| Scan Data | 8-bit of greyscale (256 levels of grey) |
| Compatibility | USB 1.0, 1.1, 2.0 (Full speed) specifications |



Card

Access Control & Time Attendance



Model

Kadex+

Dimension (L X W X H), mm

85 x 19.8 x 143

Templates

Card : 50k

Transactions

200,000

Verification Method

Card & Password

Card Option

RFID (Default), Mifare/ HID (Made to Order)

Communication Method

TCP/IP, RS232, RS485

Verification Time

Card: <1s



IoT

QR Code & Smart Door



Model

QF Plus

BLE-2

Dimension (L X W X H), mm

158 x 74 x 15.6

85 x 96 x 33

Templates

Face: 6k

N/A

Transactions

1,000,000

Unlimited

Verification Method

Face &
QR Code

Mobile
App

Communication Method

Wi-Fi 2.4GHz,
Bluetooth,
4G Wireless Broadband,
USB & GPS

Bluetooth Low
Energy (BLE) 4.2,
Wiegand 26-bit input

Fingerprint Access Control & Time Attendance



Access Control & Time Attendance

Time Attendance



| Model | R2 | R3 | H2i | Q2i | TA500 | TA100C | TA200 PLUS |
|----------------------------------|--------------------------------|--------------------------------|-------------------------|--------------------------------|------------------------|----------------------------------|----------------------------------|
| Dimension (L X W X H), mm | 94 x 50 x 189 | 78 x 32 x 190 | 78 x 50 x 150 | 200 x 56 x 160 | 184 x 38 x 134 | 190 x 52 x 140 | 200 x 56 x 160 |
| Templates | Fingerprint: 3k | Fingerprint: 3k | Fingerprint: 1.5k | Fingerprint: 10k | Fingerprint: 2k | Fingerprint: 8k | Fingerprint: 10k |
| Transactions | 120,000 | 100,000 | 100,000 | 200,000 | 80,000 | 200,000 | 200,000 |
| Verification Method | Fingerprint & Password | Fingerprint & Password | Fingerprint | Fingerprint & Password | Fingerprint & Password | Fingerprint & Password | Fingerprint & Password |
| Communication Method | TCP/IP, RS232, RS485, USB disk | TCP/IP, RS232, RS485, USB disk | TCP/IP, RS485, USB disk | TCP/IP, RS232, RS485, USB disk | TCP/IP, USB disk | TCP/IP, USB disk, *RS232, *RS485 | TCP/IP, USB disk, *RS232, *RS485 |
| Verification Time | Fingerprint: <1s | Fingerprint: <1s | Fingerprint: <1s | Fingerprint: <1s | Fingerprint: <1s | Fingerprint: <1s | Fingerprint: <1s |

*Optional




Secondary Terminal Cost-Effective Access Solution



| Model | i-Kadex | R3c | QR110 |
|----------------------------------|-----------------------------|--------------------------------------|-----------------------------|
| Dimension (L X W X H), mm | 55 x 15 x 100 | 80 x 40 x 125 | 86 x 40 x 86 |
| Templates | Storage in Primary Terminal | Storage in Primary Terminal | Storage in Primary Terminal |
| Transactions | Storage in Primary Terminal | Storage in Primary Terminal | Storage in Primary Terminal |
| Verification Method | Card | Fingerprint (1:N) | QR Code |
| Communication Method | Wiegand | RS485 (Connects to Primary Terminal) | Wiegand, RS485 |
| Verification Time | Managed by Primary Terminal | Managed by Primary Terminal | Managed by Primary Terminal |

TIMETEC CLOUD CITY

A Smart City Ecosystem

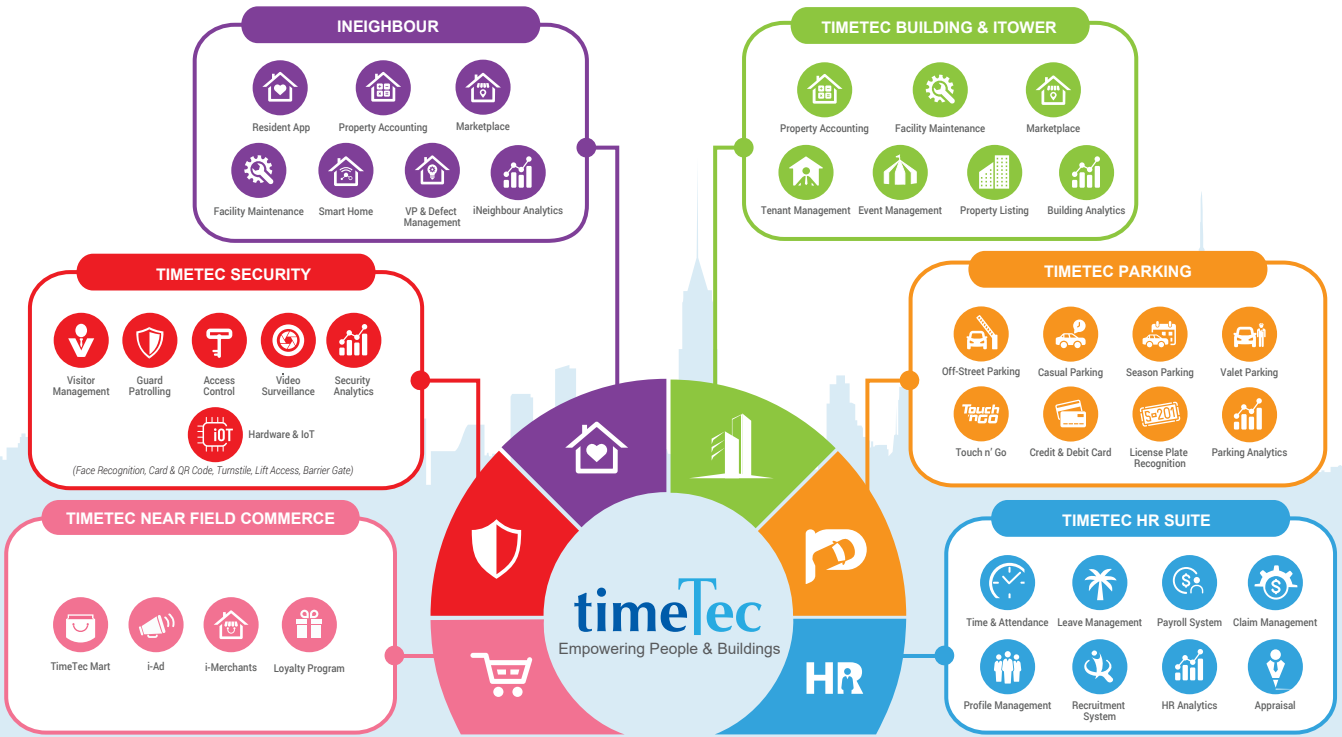


iNeighbour **timeTec** HR **FINGERTEC**

- 20+ Years on the Market
- 400+ Active Resellers
- 30+ Patents
- 15+ Languages
- ISO 27001
- CMMI Level 3
- PDPA & GDPR Compliance
- SLA

CLIENTELE

1 Million+
Worldwide Installations

35 Million+
Active Users

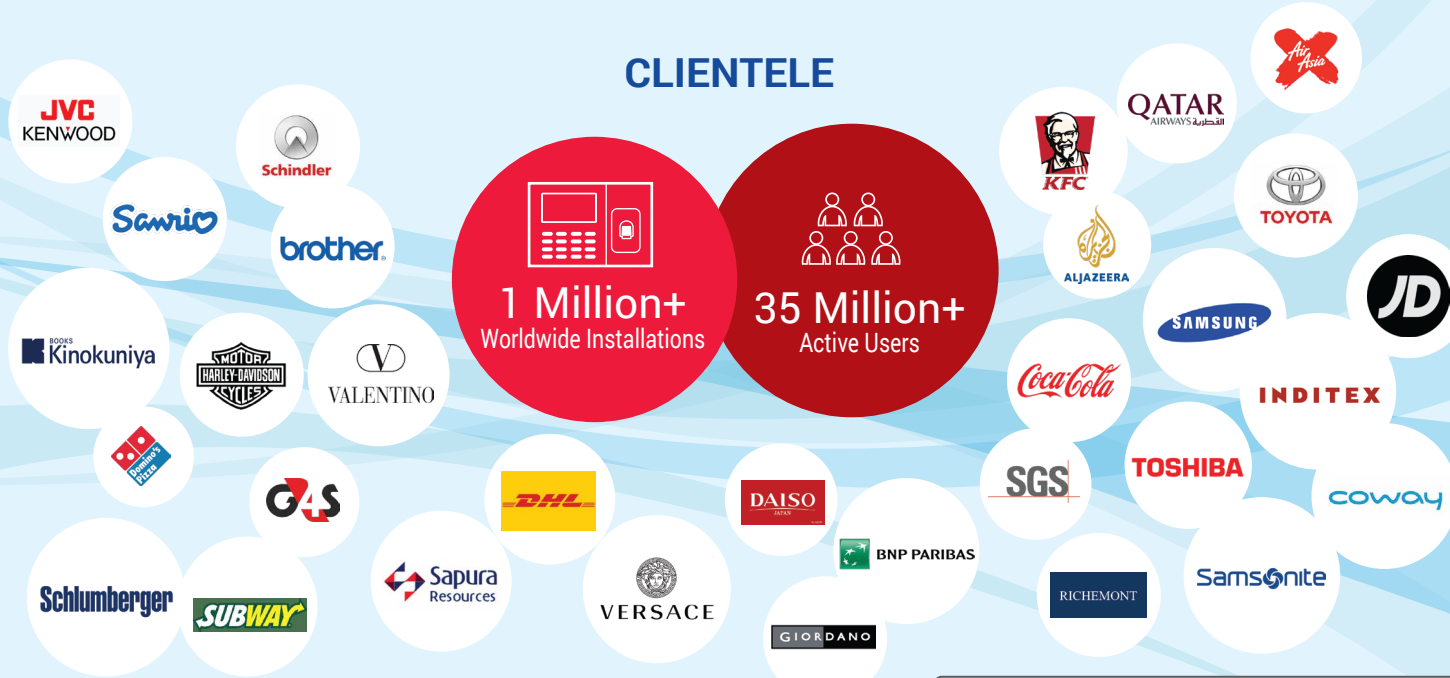

Supported browsers:



Mobile Application:

