



timeTec

BACK TO WORK SAFELY

D3180S

Metal Detectors with a Fever Detection

D3180S is a walk-through metal detector embedded with body temperature measurement. 18 detection zones and 256 sensitivity levels established the fastest and most efficient way for temperature measurement performances. Built-in with fever alarm with the tolerance of up to 37.3? – decrease detection error and avoid cross infection. This device replaces manual inspection methods with a systematic flow of accuracy detection. A dependable and flexible intelligence security solution. D3180S, a comprehensive security system to protect premise security.

Suitable to be used in exhibition centers, government offices, electronic factory, prison, bank & hotel.



Adjustable Sensitivity Levels
256 sensitivity levels measurement for each detection zone



Password Protection
Heightened security under the operation of authorized personnel only



Harmless Screen Check
No potential danger to heart pacemaker wearers and pregnant women



Multi-location Detection
18 detection zones to accurately locate metal objects



Self-diagnosed Program
Automated Immediate health checker.
Calibration- not-required



Anti-interference System
Strong shield of interference in environment to maintain performance analysis



timeteccloud




timeteccloud




info@timeteccloud.com

©2020 Timetec Cloud Sdn Bhd. All rights reserved.

SYSTEM DIAGRAM

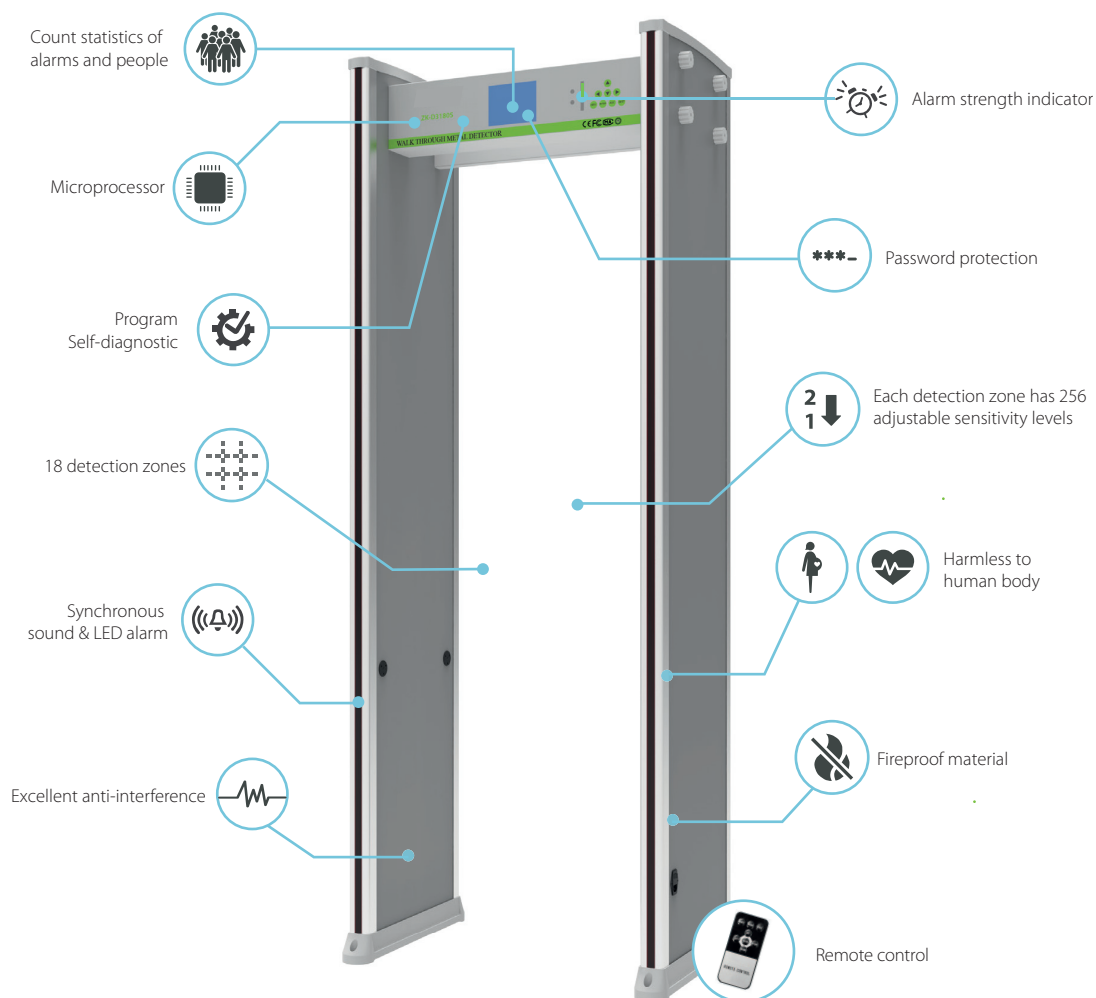

DIMENSIONS

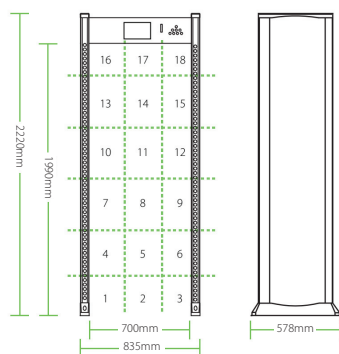

SPECIFICATIONS

| MODEL | D3180S |
|--|-----------------------|
| Power Supply | AC100V~240V |
| Working Temperature | -20°C~50°C |
| Working Frequency | 4kHz~8kHz |
| External Dimensions (H*W*D) | 2220 x 835 x 578 (mm) |
| Internal Dimensions (H*W*D) | 1990 x 700 x 578 (mm) |
| Package Dimensions (H*W*D) | 2130 x 350 x 665 (mm) |
| Gross Weight | 65kg |
| Temperature Sensor Type | IR temperature sensor |
| Temperature Measurement Time | ≤1s |
| Temperature Measurement Point | Brow or wrist |
| Best Temperature Measurement Distance | 150mm |
| Height of Temperature Sensor from the Ground | 1500mm (customizable) |
| Temperature Measurement Deviation | ±0.5°C |
| Temperature Range | 30°C - 45°C |
| Interval Between Temperature Measurement | 2s |

Note: Specifications are subject to change without prior notice.

Authorized Reseller: