

## Cloud-Based Hybrid Biometric



## TIMETEC TC30

### Cloud-Based Time Attendance Terminal

Employing cutting-edge deep learning algorithms, the face recognition terminal excels in rapid and precise face detection, ensuring unparalleled accuracy. This adaptable system provides a spectrum of authentication choices, encompassing facial recognition and card-based methods. Its versatility extends to a wide array of contexts, including offices, corporate environments, financial sectors, and beyond, underscoring its extensive applicability.



#### Proactive Facial Recognition

Advanced facial recognition technologies



#### New Height of Anti-Spoofing

Protect against print attack (laser, color and B/W photos), videos attack and 3D mask attack.



#### Speedy Recognition

Recognition happens in seconds



#### Further Authentication Distance

Impressive facial recognition distance spanning from 30cm to 150cm.



#### Touchless Recognition

Contactless for better hygiene



#### Various Clocking Methods

Face, Card & Password



#### Instant Notification

Receive notification from tardiness and absenteeism (subject to subscription with TimeTec Attendance)



#### Stable Communication Method

Fast and stable connection for better performance







#### Linux-Based Hybrid Biometric


A highly reliable and secure operating system



TimeTec HR

<https://www.timeteccloud.com/hr-suite-overview/>

-  User Guide
-  Video Guide
-  Technical Tips
-  FAQ

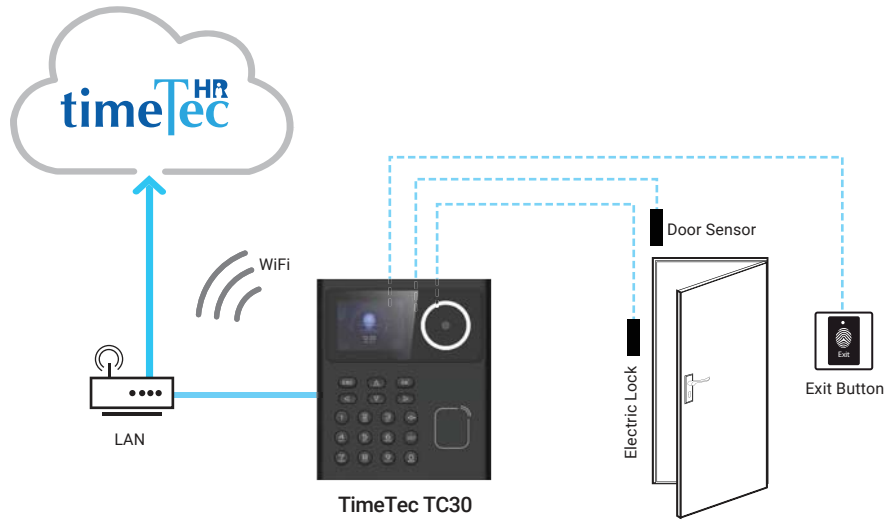

SPECIFICATIONS

<b>MODEL</b>	TimeTec TC30
<b>DISPLAY</b>	2.4-inch TFT Screen
<b>FACE CAPACITY</b>	500
<b>CARD CAPACITY</b>	1,000
<b>TRANSACTIONS</b>	100,000
<b>COMMUNICATION</b>	Wifi, TCP/IP
<b>STANDARD FUNCTIONS</b>	DST, Automatic Status Switch, T9 Input, Camera, 9-digit User ID, Multiple Verification Methods
<b>HARDWARE</b>	2MP Binocular Camera
<b>OPERATION SYSTEM</b>	Linux
<b>ACCESS CONTROL INTERFACE</b>	3rd Party Electric Lock, Door Sensor, Exit Button
<b>OPTIONAL FUNCTIONS</b>	125kHz ID Card (EM)
<b>FACIAL RECOGNITION SPEED</b>	<0.2s
<b>POWER SUPPLY</b>	12V 1A
<b>WORKING HUMIDITY</b>	0 to 90%
<b>WORKING TEMPERATURE</b>	-10°C to 55°C
<b>DIMENSIONS (W*H*D)</b>	130 * 150 * 24.7 (mm)
<b>Supported Software</b>	TimeTec HR

Note: Specifications are subject to change without prior notice.

Authorized Reseller: