

upon arrival.

The trilingual TimeTec VKiosk-1 enhances security, reduces wait times, and improves visitor management efficiency. Additionally, the QR code or facial recognition can serve as a credential when integrated with access control systems and visitor logs, ensuring seamless tracking and reporting.



Streamlines Check-In

Reduces queues by allowing visitors to self-registering quickly.



Generates Real-Time Insights

Provides instant digital logs of visitor arrivals and departures for improved reporting and analytics.



Reduces Operational

Lowers labor costs over time by automating repetitive registration tasks.



Self-verifying

Visitors self-ID scanning (ICs, Passports) with built-in OCR technology.



Enhances Branding

Allows for customized interfaces that reflect the company's brand and promote a professional, tech-forward image.



Increases Staff Efficiency Frees up reception staff



Enhances Visitor Experience

Provides a modern, user-friendly interface for a smoother visitation and a better impression.



Strengthens Security

Can be integrated with QR code or face recognition readers for door and turnstile access control.



Improves Data Accuracy Minimizes errors.










VISITOR WORKFLOW

Pre-registered Visitors

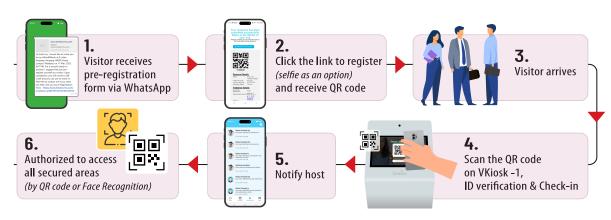



SPECIFICATIONS



31 Ech Text110113	
MODEL	VKiosk-1
Dimension (L X W x H), mm	400 x 360 x 1435
Weight	22KG
SYSTEM	
System OS	Android: 13
Processor	RK3588 Quad-core Cortex-A76 2.4GHz
Memory (RAM)	8GB
Storage	Android: 128GB eMMC Flash
PANEL	
Size / Active Area (mm)	13.3"(16:9), 33.78cm, Active matrix TFT LCD (LED) / 293.76 mm x 165.24 mm
Resolution / Contrast	1920 x 1080 (16:9)
Viewing Angle	Horizontal: 178° total / Vertical: 178° total
Color Depth/Brightness	16.7 million / 400 nits
Response Time / Freq	30 (Typ.)(Tr/Td) ms / Horizontal: 30 - 60 KHz / Vertical: 50 - 75 Hz
TOUCH	
Touch Technology / OS	PCAP (Projected Capacitive) - 10 Touch Capacity / Android
Surface Treatment	Water, Dust & Vandal proof; Optional: Anti-glare, Anti-fingerprint, Anti-smudge, Anti-bacterial
I/ O PORTS	
Android	USB x4 / COM x2 / HDMI x1 / LAN x1 / WIFI x1 / DC x1 / TF-CARD x1 / Audio x1 / 4G x1
POWER	Supply / Consumption: 100-240 VAC / 12VDC +/- 5%; 20W typical, 1.5W sleep, 0.5W off
MECHANICAL	Product Dimensions: 339.5x211x55.5(A) 49.5(S)mm / Weight(Unpacked/Packed): 3 / 4kg Box Dimensions: 490 x 356 x 141mm / VESA Mounting: 75 x 75 / 100 x 100mm
ENVIRONMENTAL	Operating / Storage Temperature: -10°C to 50°C / -20°C to 60°C
ACCESSORIES	Power adapter / cable, flush mount brackets w/screws (opt.)
OTHERS	MTBF / Warranty / Enclosure Color: 50,000 hours demonstrated / 1-year / black \mid silver Ready for Use: 24/7, A = Aluminum Back, S = Steel Back in above "Mechanical"
SOFTWARE	i-Vizit

Note: Specifications are subject to change without prior notice.



