timeTec

www.i-timetec.com

SMART CURTAIN CONTROL PANEL
AUTOMATES YOUR BORING DAILY ROUTINE

User Guide

www.i-timetec.com

PRODUCT BRIEF

The **TimeTec Smart Curtain Control Panel** can use its touch buttons to control the electric curtain, or control by i-TimeTec smartphone App after the smart home system is setup.

FEATURES

① Soft touch control button

② Beeper for operation

③ LED indicator

④ Smartphone App control

TECHNICAL SPECIFICATION

Working voltage: AC 180V-250V 50Hz

Standby current: <=4mA

Working temperature: -10 - 55°C

Working humidity: <=90%RH

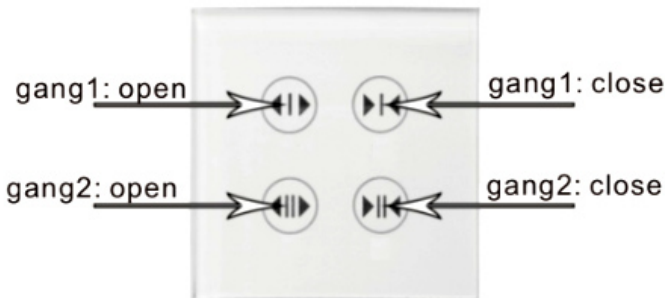Communication distance: <=100M (open environment)

Type of output: dry contact
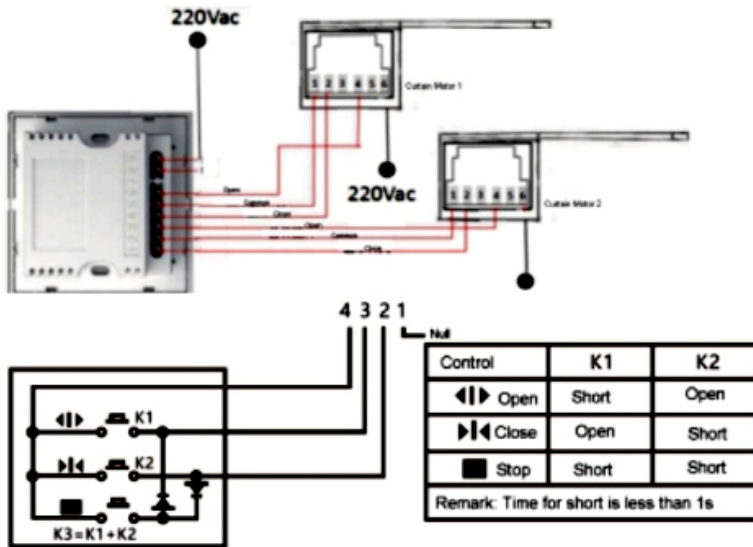
Dimension: 85mm x 85mm x 36mm

Installation: flush mount

HOW TO USE

How to add the device to your smart home system?

- Log in to your i-TimeTec App account

- In the main menu, select Add Device, then scan the QR code of the device (QR code is on the back and also on the PCB after remove the front panel).

- Add the device to the TimeTec Smart Gateway or TimeTec Smart Camera Gateway.

- Connect the device to electricity wires, power it up so it will connect to the TimeTec Smart Gateway by wireless.

- Touch the button to control the curtain, the beeper sounds

- The device can also be controlled by the i-TimeTec smartphone App.

gang1: open   gang1: close

gang2: open   gang2: close

WIRING DIAGRAM

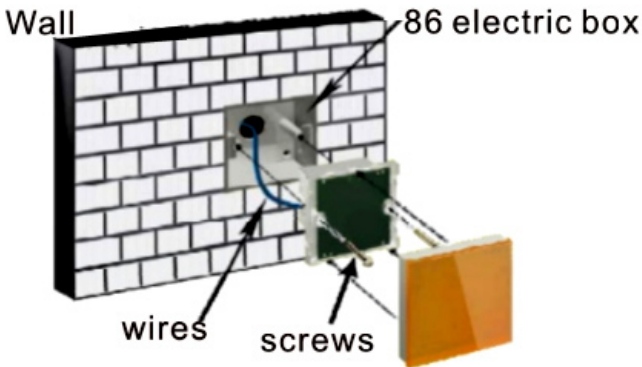| Control		K1	K2
◀▮▶ Open	Open	Short	Open
▶▮◀ Close	Close	Open	Short
▮ Stop	Stop	Short	Short
Remark: Time for short is less than 1s			

Remark:

This wiring example is based on the above control logic. If your curtain motor uses a different logic by default, please change the setting to make it match.

www.i-timetec.com

INSTALLATION

- Install the standard 86 electric box onto the wall
- Connect the electric wires to the switch correctly
- Fix the switch onto the 86 electric box with screws
- Fix the front panel onto the switch
- Finish the installation

Smart Curtain Control Panel

TROUBLESHOOTING

- **If i-TimeTec Smartphone App control fail:**
  Check whether the device is already added and connected to the TimeTec Smart Gateway.

- **If Curtain control fail:**
  Check the setting of your curtain motor, make sure it match the control logic as shown in this manual.

IMPORTANT NOTICES

- The device shall be installed in a dry place without chemical corrosion

- The device shall be installed in a place without high electromagnetic interference.

- Do not connect to the electricity supply during installation. Double check the wiring before power it up.

- Please contact service agent if the unit does not work properly.