

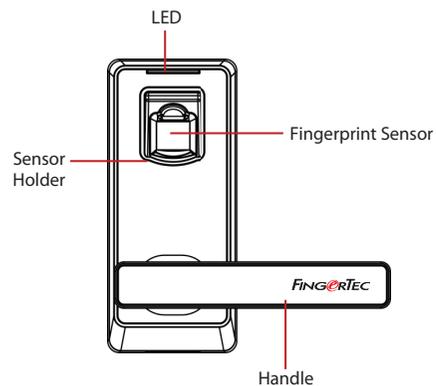


ML-10B

# Terminal Overview

•ML-10B

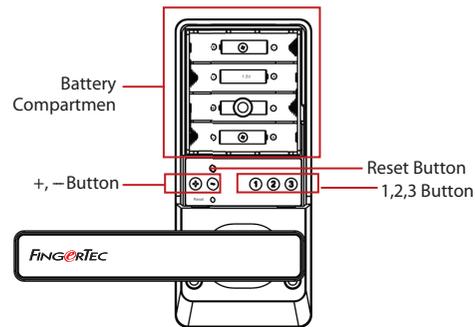

## 1 Download TimeTec Security App



Download TimeTec Security App to manage ML-10B Smart Lock efficiently.  
To download the App, scan the QR Code below.



## 2 Register An Account

1. The lock owner or the initial person who handles the lock is the Admin.
2. Before any user can access to TimeTec Security App, the Admin has to create an account using an email address of a user.
3. The user will receive an email confirming that he has been registered an account by the admin

## 3 Activate the Account

1. Launch the TimeTec Security app that you have downloaded.
2. Activate your TimeTec Security account by following the instructions received in the email.

## 4 Login and Use

1. Login to the App by using the registered email and password.
2. Tap **Menu** > **Smart Access** > **Unlock Doors**
3. The App will start to search for nearby smart locks and display the list on screen
4. Tap **Unlock** to open the smart lock of your choosing

*Note: Ignore the following smart lock operation steps if you are only using the App.*

## Commands for ML-10B without Using TimeTec Security App

(+)	(-)	(1)	(2)	(3)
Add	Delete	Admin (10 user)	Normal User (60 user)	Temporary User (20 user)

<b>Power On</b>	Touch the infrared sensor hole located at the fingerprint sensor holder - Refer diagram
<b>Register First Admin</b>	Touch the infrared sensor hole to power lock > Press + button > Place a finger 3 times on the fingerprint sensor <i>Note: The first user will automatically be the admin of the ML-10B smart lock</i>
<b>Register User</b>	Touch the infrared sensor hole to power lock > Press + button > Place admin finger 1 time to verify Admin > Press 1, 2 or 3 button to select user group > Place one of user fingers 3 times on the fingerprint sensor.
<b>Delete User</b>	Touch the infrared sensor hole to power lock > Press - button > Place admin finger 1 time to verify Admin > Long press on 1, 2 or 3 button 3 seconds to delete the selected user group.
<b>Enable Normal Open</b>	Place any registered finger to do verification and then long press button 1 for 3 seconds.
<b>Disable Normal Open</b>	Place any registered finger to disable.
<b>Light &amp; Sound Indication</b>	Success: GREEN indicator light that comes with a long beep Failure: RED indicator light that flashes two times and comes with two short "beep"s.

You can view the complete Admin & User Guide in the App or <http://info.fingertec.com/ML10B-3>