

## High-Quality TimeTec AIPHONE IP Intercom




## AIPHONE IP Intercom

Embeddable with TimeTec Parking Kiosk (TPK) & Payment Machine (APM)

The TimeTec AIPHONE IX-DA is a surface mount IP addressable video parking intercom station. The AIPHONE IX-BA is a surface mount IP addressable audio only parking intercom station. Both units are weather resistant. They connect to the network using CAT-5e/6 cable. The IX-DA unit is equipped with a fixed camera with vertical angle adjustment. The IX-DA is ONVIF Profile S compliant. The parking intercom stations can call up to 20 different master stations (IX-MV or instances of IX Mobile). An additional 20 master stations can be called using the contact input. The speaker and microphone allow for two-way communication with a master station or the IX Mobile App. The 600 ohm output can be used for paging announcements or to run audio to an external speaker/horn. The units are 802.3af PoE compliant. Both TimeTec AIPHONE IX-DA & IX-BA support one-touch button for emergency calling for parking industry.





# SYSTEM DIAGRAM

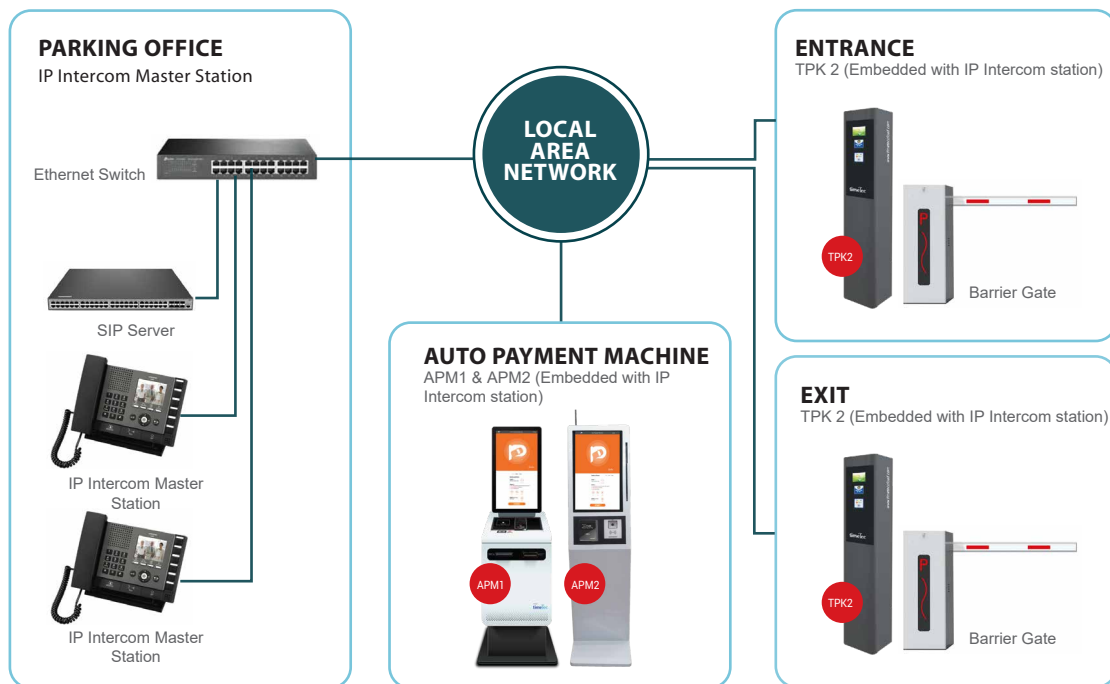

## SPECIFICATIONS

<b>Power Source</b>	802.3af PoE compliant
<b>Communication</b>	Open voice hands-free
<b>Camera</b>	1/4" color CMOS VGA
<b>Min. illumination</b>	5 Lux
<b>Wiring</b>	CAT-5e or CAT-6
<b>Wiring distance</b>	330'
<b>Door release</b>	24V AC/DC, 500mA (N/O, COM, N/C)
<b>Audio out</b>	600Ω, 300mV RMS
<b>Operating Temp</b>	-40° - 140°F (-40° - 60°C)
<b>Ingress Protection</b>	IP55
<b>Dimensions</b>	5-1/16"H x 3-13/16"W x 1-5/8"D

### FEATURE CALL-OUT DEFINITIONS

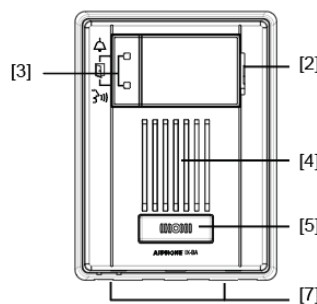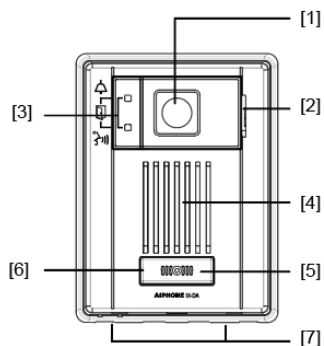

- [1] Camera
- [2] Microphone
- [3] Status LED's
- [4] Speaker
- [5] Call button
- [6] White LED (for night viewing)
- [7] Water escape holes (do not obstruct)

Note: Specifications are subject to change without prior notice.

Authorized Reseller: